TOSHIBA

Satellite® P15 Series

Feature Model(s):

Satellite P15-S420

P4 3000/15.4"Wide XGA/512MB/80GB/DVD+-R/+-RW/Mdm/LAN/Wi-Fi/WinXP Home

Satellite P15-S4201

P4 3000/15.4"Wide XGA/512MB/80GB/DVD+-R/+-RW/Mdm/LAN/Wi-Fi/WinXP Pro

Product Highlights

Performance

- Intel® Pentium® 4 processor with HT Technology
- 512MB of Main Memory
- 80GB* hard disk drive

Great Features

- 15.4" Wide XGA active matrix display
- NVIDIA® GeForce™ FX Go5100, 32MB DDR video memory
- DVD+-R/+-RW drive

Get On-Line

- Integrated V.92/56K modem
- Integrated 10/100 Ethernet LAN
- Integrated 802.11g Wireless LAN

System Characteristics

CPU (See CPU Performance Disclaimer)**

Intel® Pentium® 4 processor at 3.00GHz **

L2 Cache

- 512KB Level 2 Cache integrated on die
- 800MHz Processor System Bus Clock Speed (PSB) / Hyper-Threading Technology support

Memory

- 512MB DDR SDRAM (Expandable to 2048MB) (Both slots may be occupied)
- Expansion memory: 128/256/512/1024MB, 2.5V, SODIMM, PC2100 DDR SDRAM
- Data/Address Bus Width; 64-bit/32-bit
- Intel® 865PE + ICH5 Chipset

Mass Storage

- Primary Hard Disk Drive: 80GB* hard disk drive, 4200rpm, Enhanced IDE (ATA-5) Interface, 9.5mm height, 0.2lbs,, Service removable
- Main Bay DVD+-R/+-RW Drive: ATAPI Interface; Maximum speed (READ): DVD-R (4x), DVD-RW (4x), DVD+R (4x), DVD+RW (4x), CD-R (24x), CD-RW (20x), CD-ROM (24x), DVD-ROM (8x); (WRITE): CD-R (16x), CD-RW (4x), DVD-R (2x), DVD-RW (2x), DVD+R (2.4x), DVD+RW (2.4x)
 Compatibility: CD-R (read/write), CD-RW (read/re-write), CD-ROM, DVD-ROM, DVD-R (read/write), DVD-RW (read/re-write), DVD+R (read/write), DVD+RW (read/re-write)
- Software Decoder: InterVideo® (Win-DVD™4)

Graphics/Video

- 15.4" Wide XGA (diagonal) TFT active-matrix display****; internal display supports up to 16M colors at 1280 x 800
- NVIDIA® GeForce™ FX Go5100 graphics controller; 32MB DDR external video memory
- Direct 3D support, OpenGL support
- External Color Support/Refresh Rate: (Depending on CRT)

800 x 600: 60/70/72/75/85/100/120Hz 60/70/72/75/85/100/120Hz 1024 x 768; 1280 x 800: 57/60/70/72/75/85/100/120Hz 1280 x 1024; 60/70/72/75/85/100/120Hz 1440 x 900; 60/70/72/75/85/100Hz 1600 x 1200; 60/70/72/75/85/100Hz 1680 x 1050; 60/70/72/75/85/100Hz 1920 x 1200; 60Hz 1920 x 1440; 60Hz 2048 x 1536; 60Hz

Input Devices

 Keyboard: Full sized 85 keys with 12 function keys, 2.7mm key stroke, 6mm height; Dedicated Windows® & Application keys

Part Numbers

PSP10U-3ZJ97V

PSP10U-3ZJ976

support; HotKey function; TouchPad pointing device

- CD Control Function: Play/Pause, Stop/Eject, Previous, Skip/Next, Mode Control switch (CD/DVD/Digital Audio)
- Toshiba Console button & Instant Access Internet button
- One Touch TV-out button

Expandability

- 2 memory slots (Both slots may be occupied)
- 1 PC Card slot supports 1 Type II

Communications

Integrated V.92/56K modem; Data and fax support

Due to FCC limitations, speeds of 53kbps are the maximum permissible transmission rates during Download. Actual data transmission speeds will vary depending on line conditions.

- Integrated 10/100 Ethernet LAN
- Integrated 802.11g Wireless LAN (Atheros)

Ports

- RGB (monitor) port
- Parallel port
- 3 Universal Serial Bus ports (USB 2.0)
- TV-Out (S-Video)
- RJ-45 LAN port
- RJ-11 modem port
- i.Link (IEEE 1394) port
- Secure Digital® (SD) card slot

Physical Description

- Dimensions (LxWxH): 14.2: x 10.8" x 1.7"
- Weight: 7.99lbs

LED Indicators: Power, HDD, DVD/CDRW, DC-IN, Caps Lock, Arrow, Numeric, Main Battery Charging Status, System Sleep/Suspend Status, SD Card, Wireless Communication (left side)

Sound

- Realtek ALC202 Codec Chip, Software Sound
- 16-bit stereo, Windows Sound System Ver. 2.0; SoundBlaster® Pro compatible (in DOS box only)
- Built-in stereo speakers
- Direct 3D Sound (supported by sound driver); Hardware acceleration for DirectSound and DirectMusic; Full Duplex and MIDI (play back) support
- Sound Volume (by Dial)
- Ports: External Microphone port, headphone port (stereo), Line-in port

Power Supply

 AC Adapter: 120W AC Adapter, 100-240V / 50-60Hz frequency (Universal) input voltage, 19V x 6.3A Output.
 Dimensions (LxWxH): 5.9" x 2.5" x 1.5"

Weight: 1.38lbs

 Battery Pack: 12-cell, rechargeable, removable Lithium Ion (Graphite) battery; 14.8V x 6450mAh
 Dimension (LxWxH): 4.9" x 5.3" x 0.9"

Weight: 1.3lbs

 Battery Saver (in WindowsXP): Stand by, HDD Auto Off, Display Auto Off, Hibernation

Battery Life: 2.0H ***

Recharge Time (Off/On): Main Battery– Up to 4Hrs/ Up to 12Hrs Battery life may vary depending on applications, power management settings and features utilized. Recharge time varies depending on usage. Battery may not charge while computer is consuming full power. After a period of time, the battery will lose its ability to perform at maximum capacity and will need to be replaced. This is normal for all batteries. To purchase a new battery pack or see information on accessories shipping with your computer, visit the Toshiba website at

www.accessories.toshiba.com

Toshiba America Information Systems Inc. ("TAIS") shall not be liable for damages of any kind for use of this information, which is subject to change without notice. Copyright 2004 TAIS satellite_P15-S420.doc Created on Created on 1/22/2004 4:52 PM Rev. 1.1 Page 1 of 3

TOSHIBA

Security

Slot for computer lock, memory (2 screws), Built-in Modem (2 screws), Wireless LAN module (2 screws), Main Module Bay (by 2 screws), Main Battery (by sliding latch), User Power-on password, Setup Security, Screen Blank (by Hotkey), Screen Saver (by software)

Bios

• ACPI, PnP, VESA, DPMS, DDC, SM BIOS, PCI BIOS support

Operating System

- Microsoft® Windows XP Home pre-installed (P15-S420)
- Microsoft® Windows XP Pro pre-installed (P15-S4201)

Additional Software

- Microsoft® Works
- Microsoft® Office OneNote™
- InterVideo® Win-DVD Creator Plus
- ArcSoft ShowBiz® Ver 1.3
- Drag'n Drop CD+DVD Software
- Toshiba Notebook Maximizer
- Intuit® Quicken® New User's Edition 2004
- Norton® AntiVirus™ 2003 w/3 Month Subscription
- AOL® (3-month offer)

AOL OFFER DETAILS: Availability may be limited, especially during peak times. TO AVOID BEING CHARGED A MONTHLY MEMBERSHIP FEE, SIMPLY CANCEL BEFORE THE THREE-MONTH PROMOTIONAL PERIOD ENDS. Premium services carry surcharges and communication surcharges may apply, including AK, even during promotional period. Members may incur telephone charges on their phone bill, depending on their location and calling plan, even during promotional period. Available to new AOL members in the United States, age 18 or older; a major credit card or checking account is required.

- Adobe® Acrobat Reader
- AT&T® Worldnet® Service 1 Month Free
 Telephone access and other charges and other terms and
 conditions may apply. Offer available to new customers only.
 Offer expires 4/30/04.
- Microsoft Internet Explorer
- Toshiba Speech System
- QuickTime[™] Player
- RealOne™ Player 8 Basic
- Toshiba ConfigFree™ Software
- Toshiba Custom Utilities
- Satellite Series Online Documentation
- <u>Toshiba Great Software Offer</u>: Receive your choice of two software titles. The software selection includes titles from the follow categories; productivity, education/reference, creativity and entertainment

Warranty

• 1 year parts, labor and battery

SelectServ® Warranty Programs

SWP-PEQQ3V Warranty Extension to 3 Years
SWP-PEGQ3V 3 Year SystemGuard
SWP-PEQX3V 3 Year Depot Express

SWP-PEGX3V 3 Year SystemGuard + Depot Express SWP-PEQN3V 3 Year Business On-Site Repair; Next Day Business Day Response

SWP-PEGN3V 3 Year SystemGuard + Business On Site Repair,

Next Business Day Response

Environmental Specifications

- Temperature: Operating: 5° to 35°C (41° to 95°F); Non-operating: -20° to 65°C (-4° to 149°F)
- Thermal gradient: Operating: 15°C per hour maximum; Nonoperating: 20°C per hour maximum
- Relative Humidity: Operating: 20% to 80% non-condensing; Non-operating: 10% to 95% ono-condensing
- Altitude (relative to sea level): Operating: -60 to 3000 meters;
 Non-operating:-60 to 10,000 meters
- Shock: Operating: 10G; Non-operating: 60G
- Vibration: Operating: 0.5G; Non-operating: 1.0G

Product/Part Numbers

 Satellite P15-S420
 PSP10U-3ZJ97V

 Satellite P15-S4201
 PSP10U-3ZJ976

Accessories

Selected Toshiba Accessories

PA3336U-1ACA Global AC Adapter (120W)
PA3307U-1BRS Primary Battery Pack (12 Cell)
PA3109U-1FDD USB Floppy Disk Drive
PA3271U-1BTM Toshiba Bluetooth SD Card

SD (Secure Digital) Memory

 SD-M3203B3
 32MB SD Card

 SD-M6403B3
 64MB SD Card

 SD-M1283B3
 128MB SD Card

 SD-M5124B3
 512MB SD Card

Kingston Memory

KTT3311/128 PC2100/PC2700 128MB DDR KTT3311/256 PC2100/PC2700 256MB DDR KTT3311/512 PC2100/PC2700 512MB DDR

Cases

PA1326U-1NCS Toshiba Blue Backpack
PA1328U-1NCS Toshiba Executive Leather
PA1333U-1NCS Toshiba Executive Nylon

** Central Processing Unit ("CPU") Performance Disclaimer:

CPU performance in your computer product may vary from specifications under the following conditions:

- use of certain external peripheral products
- use of battery power instead of AC power
- · use of certain multimedia games or videos with special effects
- use of standard telephone lines or low speed network connections
- use of complex modeling software, such as high end computer aided design applications
- use of computer in areas with low air pressure (high altitude >1,000 meters or >3,280 feet above sea level)
- use of computer at temperatures outside the range of 5°C to 35°C (41°F to 95° F) or >25°C (77°F) at high altitude (all temperature references are approximate).

CPU performance may also vary from specifications due to design configuration

Under some conditions, your computer product may automatically shutdown. This is a normal protective feature designed to reduce the risk of lost data or damage to the product when used outside recommended conditions. To avoid risk of lost data, always make back-up copies of data by periodically storing it on an external storage medium. For optimum performance, use your computer product only under recommended conditions. Read additional restrictions under "Environmental Conditions" in your product Resource Guide. Contact Toshiba Technical Service and Support for more information.

**** **TFT Display Disclaimer:** Small bright dots may appear on your TFT display when you turn on your PC. Your display contains an extremely large number of thin-filmtransistors (TFT) and is manufactured using high-precision technology. Any small bright dots that may appear on your display are an intrinsic characteristic of the TFT manufacturing technology.

Return Policy

TAIS does not accept the return of component parts, or bundled software, which have been removed from the PC system. Pro-rata refunds on individual PC components or bundled software, including the operating system, will not be granted. If you wish to return a complete PC system, contact the TAIS dealer where you purchased the product, and comply with the dealer's standard return policies and procedures.

Subject to Change

While Toshiba has made very effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, prices, system/component/options availability are all subject to change without notice. For the most up-to-date product information about your computer, or to stay current with the various computer software or hardware options, visit Toshiba's Web site at pcsupport.toshiba.com

^{*} Go to www.accessories.toshiba.com for additional, available accessories

^{*}GB = 1 Billion Bytes


TOSHIBA

*** Business Winstone® 2002 BatteryMark™ Version 1.0


These models achieved the battery life times shown using Ziff Davis Media Inc.'s Business Winstone® 2002 BatteryMark™ Version 1.0. These tests were performed without independent verification by the VeriTest testing division of Lionbridge Technologies, Inc. ("VeriTest"). Neither Ziff Davis Media Inc. nor VeriTest makes any representations or warranties as to the results of the tests. Winstone® is a registered trademark and BatteryMark™ is a trademark of Ziff Davis Publishing Holdings Inc. in the U.S. and other countries. Copyright 2002 Ziff Davis Media Inc. All Rights Reserved. All products used in the tests were shipping versions available to the general public. The battery life results were achieved running the Business Winstone® 2002 BatteryMark™ Version 1.0 on the following system parameters. System parameters were set according to Ziff Davis Media Inc.'s recommendations.

	Battery Life	Catalog Spec (1st) (1st+2nd)	2.0H -
		Number of Conditioning Phase	1
		Life Test Run	2
	CPU Name		Intel® Pentium®4 Processer
	Processor info	speed	3.0GHz
		number of processors	1
	amount of RAM		512MB
	Amount of secondary RAM cache		512KB
			•
	Battery	type(1st)	Li-lon
			14.8Vx6450mAh(12cell)
		model number(1st)	PA3307U-1BAS/1BRS
		type(2nd)	-
			-
		model number(2nd)	-
		number of batteries	1st=1 , 2nd=0
;	Graphics		nVIDIA
	amount and type of RAM		64MB
			DDR
	graphics driver name and version		nVIDIA Display Driver
	graphics resolution and color depth, refresh rate		15.4"Wide 1920 x 1200/32bit/60Hz
)	hard disk capacity		60GB (5400rpm)
	hard disk file system & transfer mode+C15		Enhanced IDE(ATA-5)
	hard disk controller model		Intel® 82801EBM
	size of hardware cache if any		-
			Windows XP Profession
	operating system version, service pack		Service Pack 1
	other special conditions		N/A


Front with display open

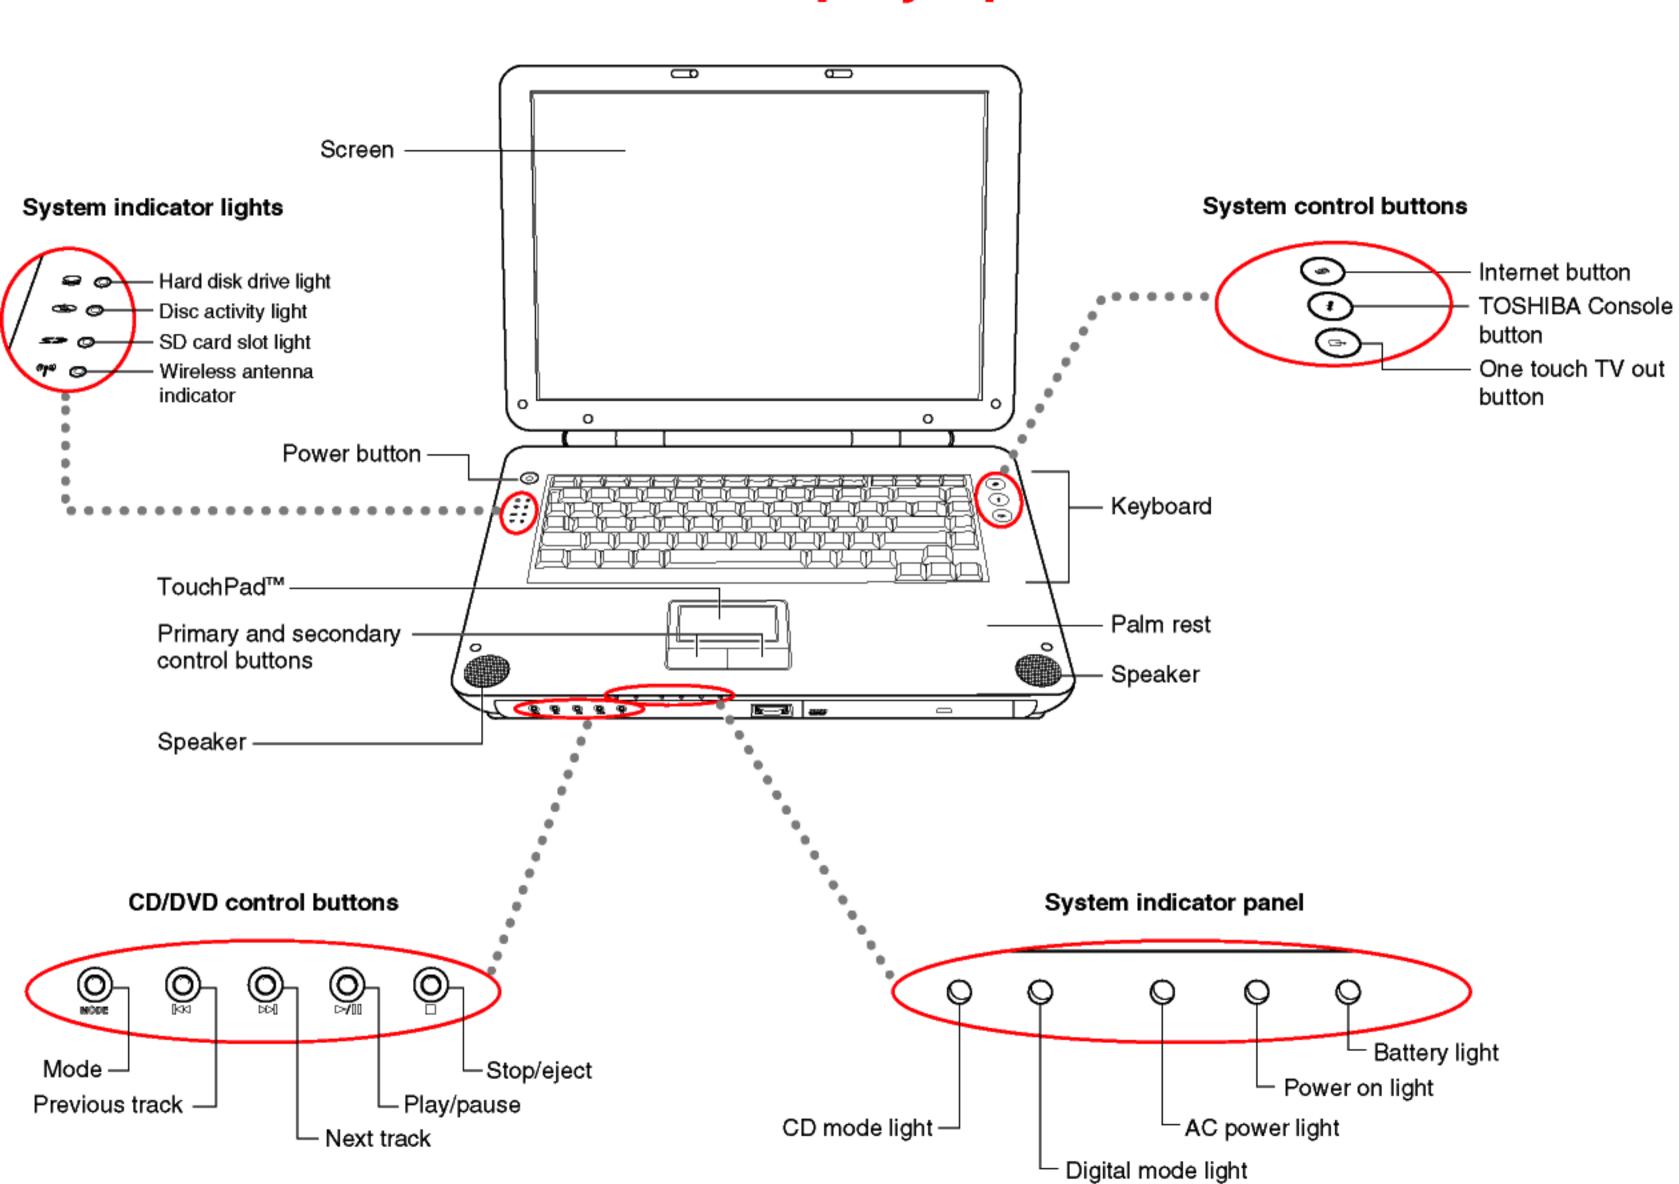


Front with display closed

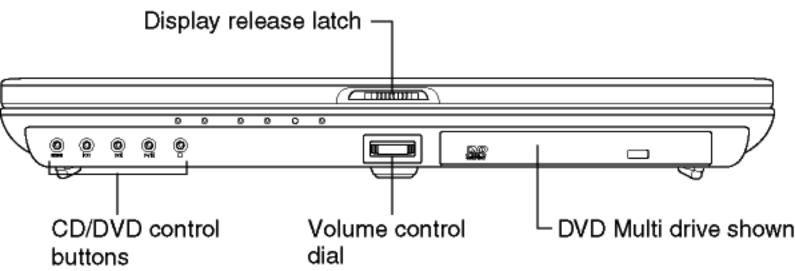

Right side

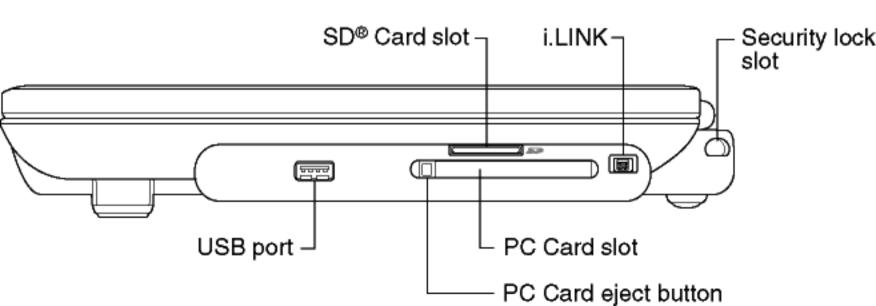


Left side

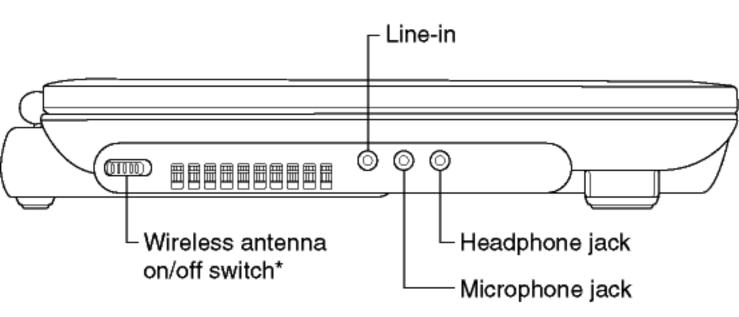


*Functional only on systems with wireless module installed.

Back

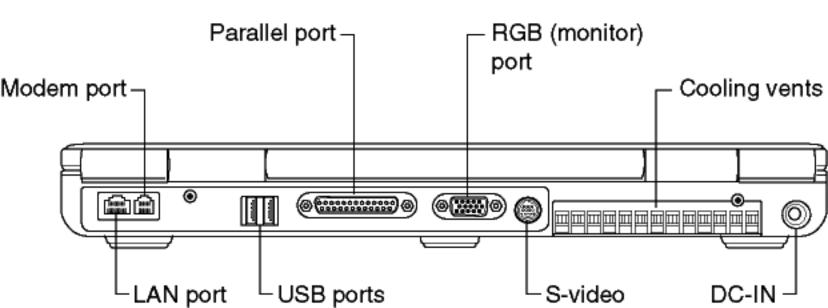

Underside

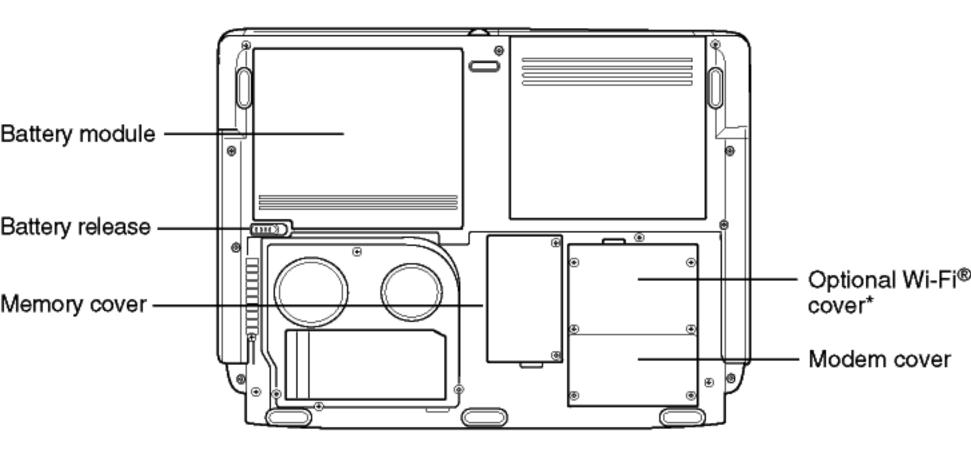

^{*}Functional only on systems with wireless module installed.